


# NOMA<sup>®</sup> P.I.

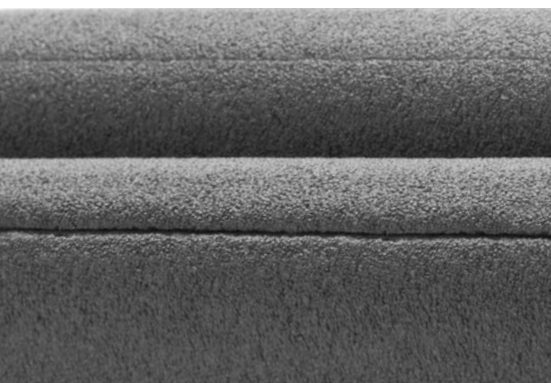

Pipe insulation made from polyethylene-based closed-cell foam offering the best technical properties for heating and plumbing applications.

- Reduces energy losses

## Product properties

- Thermal conductivity (DIN 52613/EN ISO 8497):  
0,041 W/mK at 0°C  
0,049 W/mK at 40°C  
0,061 W/mK at 90°C
- Fire performance: E (EN 13501-1)
- Operating temperature range: 0°C to +100°C (EN 14707)





[www.nmc-insulation.com](http://www.nmc-insulation.com)

**NMC** reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

**NMC sa**  
Gert-Noël-Strasse B - 4731 Eynatten Belgium  
Phone: +32 87 85 85 00  
Fax: +32 87 85 83 55  
E-Mail: [info@nmc.eu](mailto:info@nmc.eu)



# NOMA<sup>®</sup> P.I.

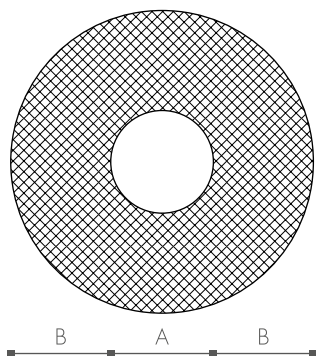

- Reduction of operating costs by reduction of energy losses.
- Reduction of CO<sub>2</sub> emissions.
- Reduces popping and flow noises.
- Protects drinking water pipes from unwanted heating and thus reduces the danger of Legionella bacteria.
- Prevents the build-up of condensation and thus prevents corrosion.
- Please ensure correct fitting by following the processing tips on our website.

## Product range

Type	A	B	Length	Packaging unit
15-09	16-17	9	1 m	165 m
18-09	19-20	9	1 m	154 m
22-09	23-24	9	1 m	110 m
28-09	29-30	9	1 m	90 m
35-09	36-37	9	1 m	70 m
42-09	44-46	9	1 m	55 m
15-13	16-17	13	1 m	120 m
18-13	19-20	13	1 m	105 m
22-13	23-24	13	1 m	90 m
28-13	29-30	13	1 m	70 m
35-13	36-37	13	1 m	55 m
42-13	44-46	13	1 m	45 m
15-20	16-17	20	1 m	67 m
18-20	19-20	20	1 m	63 m
22-20	23-24	20	1 m	54 m
28-20	29-30	20	1 m	48 m
35-20	36-37	20	1 m	35 m